

## **Flex System x240 Compute Node (E5-2600 v2)**

### **Lenovo Press Product Guide**

The Flex System™ x240 Compute Node is a high-performance server that offers outstanding performance for virtualization with new levels of CPU performance and memory capacity, and flexible configuration options. Now available with Intel Xeon E5-2600 v2 processors, the x240 Compute Node is an efficient server designed to run a broad range of workloads, armed with advanced management capabilities that allow you to manage your physical and virtual IT resources from a single pane of glass. This Product Guide describes the Flex System x240 Compute Node.

Suggested uses: Database, virtualization, enterprise applications, collaboration/email, streaming media, web, HPC, Microsoft RemoteFX, and cloud applications.

Figure 1 shows the Flex System x240 Compute Node.



Figure 1. The Flex System x240 Compute Node

### **Did you know?**

Flex System is a new category of computing that integrates multiple server architectures, networking, storage, and system management capability into a single system that is easy to deploy and manage. Flex System has full built-in virtualization support of servers, storage, and networking to speed provisioning and increased resiliency. In addition, it supports open industry standards, such as operating systems, networking and storage fabrics, virtualization, and system management protocols, to easily fit within existing and future data center environments. Flex System is scalable and extendable with multi-generation upgrades to protect and maximize IT investments.

## Key features

The Flex System x240 Compute Node is a high-availability, scalable compute node optimized to support the next-generation microprocessor technology and is ideally suited for medium and large businesses. This section describes the key features of the server.

### Scalability and performance

The x240 offers numerous features to boost performance, improve scalability, and reduce costs:

- Improves productivity by offering superior system performance with 12-core processors (up to 2.7 GHz core speeds), 10-core processors (up to 3.0 GHz core speeds), 8-core processors (up to 3.3 GHz core speeds), 6-core and 4-core processors (up to 3.5 GHz core speeds), up to 30 MB of L3 cache, and up to two 8 GT/s QPI interconnect links.
- Supports up to two processors, 24 cores, and 48 threads to maximize the concurrent execution of multithreaded applications.
- Supports up to 1866 MHz memory speeds.
- Up to 24 DIMM sockets for maximum scalability and performance.
- Supports up to 768 GB memory with 24x 32 GB LRDIMMs.
- Intelligent and adaptive system performance with Intel Turbo Boost Technology 2.0 allows CPU cores to run at maximum speeds during peak workloads by temporarily going beyond processor TDP.
- Intel Hyper-Threading Technology boosts performance for multi-threaded applications by enabling simultaneous multi-threading within each processor core, up to two threads per core.
- Intel Virtualization Technology integrates hardware-level virtualization hooks that allow operating system vendors to better utilize the hardware for virtualization workloads.
- Intel Advanced Vector Extensions (AVX) significantly improve floating point performance for compute-intensive technical and scientific applications compared with Intel Xeon 5600 series processors.
- The theoretical maximum memory bandwidth of the Intel Xeon processor E5 family is 51.6 GBps, which is 60% more than in the previous generation of Intel Xeon processors.
- The use of solid-state drives (SSDs) instead of or along with traditional spinning drives (HDDs) can significantly improve I/O performance. An SSD can support up to 100 times more I/O operations per second (IOPS) than a typical HDD.
- Supports the Storage Expansion Node providing an additional 12 hot-swap 2.5-inch drive bays for local storage.
- Up to 32 virtual I/O ports per compute node with integrated 10 Gb Ethernet ports, offering the choice of Ethernet, iSCSI, or Fibre Channel over Ethernet (FCoE) connectivity.
- The x240 offers PCI Express 3.0 I/O expansion capabilities that improve the theoretical maximum bandwidth by 60% (8 GT/s per link), compared with the previous generation of PCI Express 2.0.
- With Intel Integrated I/O Technology, the PCI Express 3.0 controller is integrated into the Intel Xeon processor E5 family. This helps to dramatically reduce I/O latency and increase overall system performance.
- Support for high-bandwidth I/O adapters, up to two in each x240 Compute Node. Support for 10 Gb Ethernet, 16 Gb Fibre Channel, and FDR InfiniBand.
- Supports the PCIe Expansion Node for support for up to six additional I/O adapters.

## Availability and serviceability

The x240 provides many features to simplify serviceability and increase system uptime:

- Chipkill, memory mirroring and memory rank sparing for redundancy in the event of a non-correctable memory failure.
- Tool-less cover removal provides easy access to upgrades and serviceable parts, such as CPU, memory, and adapter cards.
- Hot-swap drives supporting integrated RAID 1 redundancy for data protection and greater system uptime.
- A light path diagnostics panel and individual light path LEDs to quickly lead the technician to failed (or failing) components. This simplifies servicing, speeds up problem resolution, and helps improve system availability.
- Predictive Failure Analysis (PFA), which detects when system components (such as processors, memory, and hard disk drives) operate outside of standard thresholds and generates pro-active alerts in advance of possible failure, therefore increasing uptime.
- Solid-state drives (SSDs), which offer significantly better reliability than traditional mechanical HDDs for greater uptime.
- Built-in Integrated Management Module II (IMM2) continuously monitors system parameters, triggers alerts, and performs recovering actions in case of failures to minimize downtime.
- Built-in diagnostics using Dynamic Systems Analysis (DSA) Preboot speeds up troubleshooting tasks to reduce service time.
- Three-year customer replaceable unit and onsite limited warranty, next business day 9x5. Optional service upgrades are available.

## Manageability and security

Powerful systems management features simplify local and remote management of the x240:

- The x240 includes an Integrated Management Module II (IMM2) to monitor server availability and perform remote management.
- Integrated industry-standard Unified Extensible Firmware Interface (UEFI) enables improved setup, configuration, and updates, and simplifies error handling.
- Integrated Trusted Platform Module (TPM) 1.2 support enables advanced cryptographic functionality, such as digital signatures and remote attestation.
- Industry-standard AES NI support for faster, stronger encryption.
- Integrates with the IBM® Flex System™ Manager for proactive systems management. It offers comprehensive systems management for the entire Flex System platform that help to increase up-time, reduce costs, and improve productivity through advanced server management capabilities.
- Fabric Manager simplifies deployment of infrastructure connections by managing network and storage address assignments.
- Intel Execute Disable Bit functionality can help prevent certain classes of malicious buffer overflow attacks when combined with a supporting operating system.
- Intel Trusted Execution Technology provides enhanced security through hardware-based resistance to malicious software attacks, allowing an application to run in its own isolated space protected from all other software running on a system.

## Energy efficiency

The x240 offers the following energy-efficiency features to save energy, reduce operational costs, increase energy availability, and contribute to the green environment:

- Component-sharing design of the Flex System chassis provides ultimate power and cooling savings.
- The Intel Xeon processor E5-2600 v2 product family offers significantly better performance over the E5-2600 family while fitting into the same thermal design power (TDP) limits.
- Intel Intelligent Power Capability powers individual processor elements on and off as needed, to reduce power draw.
- Low-voltage Intel Xeon processors draw less energy to satisfy demands of power and thermally constrained data centers and telecommunication environments.
- Low-voltage 1.35 V DDR3 memory RDIMMs consume 15% less energy than 1.5 V DDR3 RDIMMs.
- Solid state drives (SSDs) consume as much as 80% less power than traditional spinning 2.5-inch HDDs.
- The x240 uses hexagonal ventilation holes, a part of IBM Calibrated Vected Cooling™ technology. Hexagonal holes can be grouped more densely than round holes, providing more efficient airflow through the system.

## Locations of key components and connectors

Figure 2 shows the front of the server.

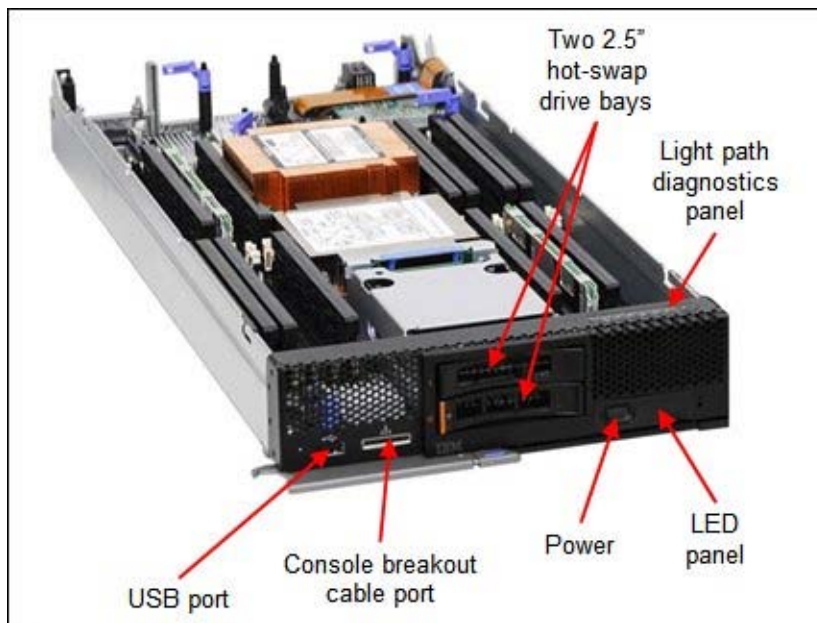


Figure 2. Front view of the Flex System x240 Compute Node

Figure 3 shows the locations of key components inside the server.

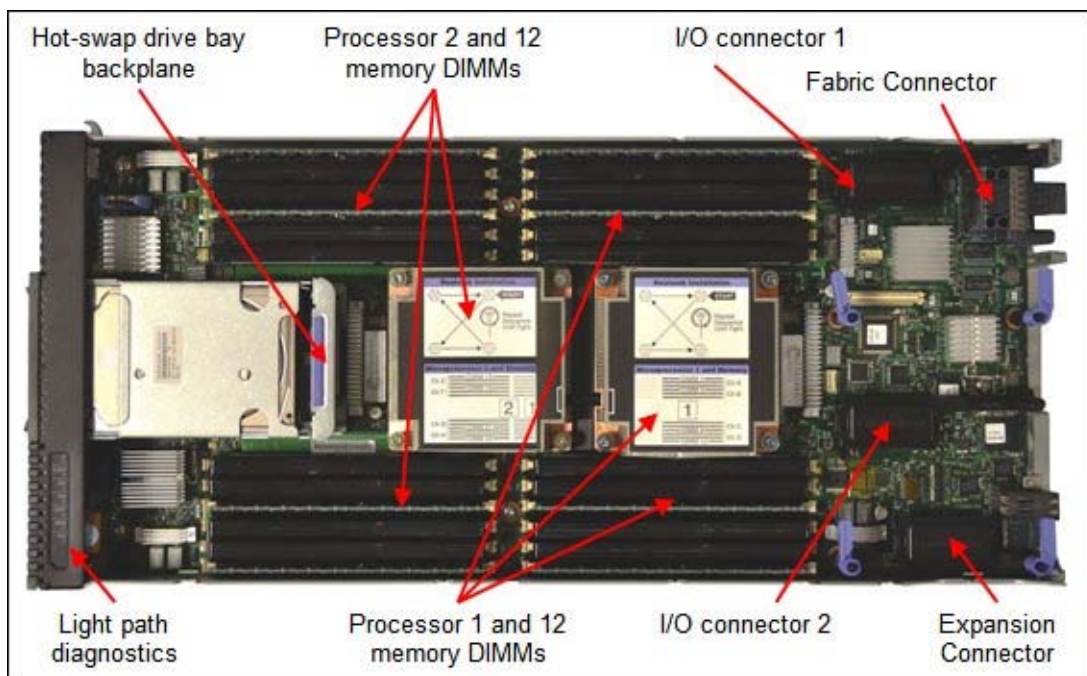


Figure 3. Inside view of the Flex System x240 Compute Node

## Standard specifications

The following table lists the standard specifications.

Table 1. Standard specifications (part 1)

Components	Specification
Models	8737-x2x, 8737-x4x, and 8737-xMx (x-config). 8737-15X (e-config).
Form factor	Standard-width compute node.
Chassis support	Flex System Enterprise Chassis.
Processor	Up to two Intel Xeon processor E5-2600 v2 product family CPUs with 12 cores (up to 2.7 GHz) or ten cores (up to 3.0 GHz) or eight cores (up to 3.3 GHz) or six cores (up to 3.5 GHz) or four cores (up to 3.5 GHz). Two QPI links up to 8.0 GT/s each. Up to 1866 MHz memory speed. Up to 30 MB L3 cache.
Chipset	Intel C600 series.
Memory	Up to 24 DIMM sockets (12 DIMMs per processor) using Low Profile (LP) DDR3 DIMMs. RDIMMs, UDIMMs, and LRDIMMs supported. 1.5V and low-voltage 1.35V DIMMs supported. Support for up to 1600 MHz memory speed depending on the processor. Four memory channels per processor (3 DIMMs per channel).
Memory maximums	With LRDIMMs: Up to 768 GB with 24x 32 GB LRDIMMs and two processors. With RDIMMs: Up to 384 GB with 24x 16 GB RDIMMs and two processors. With UDIMMs: Up to 64 GB with 16x 4 GB UDIMMs and two processors.
Memory protection	Error correction code (ECC), Chipkill (for x4-based memory DIMMs), memory mirroring, and memory rank sparing.
Disk drive bays	Two 2.5" hot-swap SAS/SATA drive bays supporting SAS, SATA, and SSD drives. Optional support for up to eight 1.8" SSDs. Up to 12 additional 2.5-inch drive bays with the optional Storage Expansion Node.
Maximum internal storage	With two 2.5" hot-swap drives: Up to 2 TB with 1 TB 2.5" NL SAS HDDs, or up to 2.4 TB with 1.2 TB 2.5" SAS HDDs, or up to 2 TB with 1 TB 2.5" SATA HDDs, or up to 3.2 TB with 1.6 TB 2.5" SATA SSDs. An intermix of SAS and SATA HDDs and SSDs is supported. Alternatively, with 1.8" SSDs and ServeRAID M5115 RAID adapter, up to 6.4 TB with eight 800 GB 1.8" SSDs. Additional storage available with an attached Flex System Storage Expansion Node.
RAID support	RAID 0 and 1 with integrated LSI SAS2004 controller. Optional ServeRAID M5115 RAID controller with RAID 0, 1, 10, 5, and 50 support and 1 GB cache. Supports up to eight 1.8" SSDs with expansion kits. Optional flash-backup for cache, RAID 6/60, SSD performance enabler.
Optical and tape bays	No internal bays; use an external USB drive. See <a href="http://support.lenovo.com/en/documents/pd011281">http://support.lenovo.com/en/documents/pd011281</a> for options.
Network interfaces	x4x models: Two 10 Gb Ethernet ports with Embedded 10Gb Virtual Fabric Ethernet LAN-on-motherboard (LOM) controller; Emulex BE3R based; FCoE/iSCSI support with Features on Demand (FoD) upgrade. xMx models: CN4022 2-port 10Gb Converged Adapter standard; Broadcom BCM57840 based; FCoE/iSCSI support standard. x2x models: None standard; optional 1Gb or 10GbE adapters.

Table 1. Standard specifications (part 2)

Components	Specification
PCI Expansion slots	Two I/O connectors for adapters. PCI Express 3.0 x16 interface. Includes an Expansion Connector (PCIe 3.0 x16) to connect an expansion node, such as the PCIe Expansion Node. PCIe Expansion Node supports two full-height PCIe adapters, two low-profile PCIe adapters, and two Flex System I/O adapters.
Ports	USB ports: One external. Two internal for embedded hypervisor with optional USB Enablement Kit. Console breakout cable port providing local KVM and serial ports (cable standard with chassis; additional cables optional).
Systems management	UEFI, Integrated Management Module 2 (IMM2) with Renesas SH7757 controller, Predictive Failure Analysis, light path diagnostics panel, automatic server restart, remote presence. Support for IBM Flex System Manager™, IBM Systems Director and Active Energy Manager, and Lenovo ServerGuide.
Security features	Power-on password, administrator's password, Trusted Platform Module 1.2.
Video	Matrox G200eR2 video core with 16 MB video memory integrated into the IMM2. Maximum resolution is 1600x1200 at 75 Hz with 16 M colors.
Limited warranty	Three-year customer-replaceable unit and onsite limited warranty with 9x5/NBD.
Operating systems supported	Microsoft Windows Server 2008 R2, Red Hat Enterprise Linux 5 and 6, SUSE Linux Enterprise Server 10 and 11, VMware ESX 4. See "Supported operating systems" for details.
Service and support	Optional service upgrades are available through ServicePacs®: 4-hour or 2-hour response time, 8-hour fix time, 1-year or 2-year warranty extension, remote technical support for hardware and selected and original equipment manufacturer (OEM) software.
Dimensions	Width: 215 mm (8.5"), height 51 mm (2.0"), depth 493 mm (19.4").
Weight	Maximum configuration: 6.98 kg (15.4 lb).

The x240 servers are shipped with the following items:

- Statement of Limited Warranty
- Important Notices
- Documentation CD that contains the *Installation and User's Guide*

## Standard models

Table 2 lists the standard models.

Table 2. Standard models (Part 1)

Model	Intel Xeon Processor (2 maximum)*	Memory	Disk adapter	Disk bays†	Disks	10 GbE‡	I/O slots
Models with embedded 10 Gb Virtual Fabric Ethernet							
8737-14x	1x E5-2609 v2 4C 2.5GHz 10MB 1333MHz 80W	1x 8 GB (1333 MHz)	LSI SAS2004	2x 2.5-inch hot-swap	Open	10 GbE Embedded	1 used / 2 max
8737-24x	1x E5-2620 v2 6C 2.1GHz 15MB 1600MHz 80W	1x 8 GB 1600 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	10 GbE Embedded	1 used / 2 max
8737-B4x	1x E5-2630 v2 6C 2.6GHz 15MB 1600MHz 80W	1x 8 GB 1600 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	10 GbE Embedded	1 used / 2 max
8737-34x	1x E5-2640 v2 8C 2.0GHz 20MB 1600MHz 95W	1x 8 GB 1600 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	10 GbE Embedded	1 used / 2 max
8737-44x	1x E5-2650 v2 8C 2.6GHz 20MB 1866MHz 95W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	10 GbE Embedded	1 used / 2 max
8737-C4x	1x E5-2650L v2 10C 1.7GHz 25MB 1600MHz 70W	1x 8 GB 1600 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	10 GbE Embedded	1 used / 2 max
8737-54x	1x E5-2660 v2 10C 2.2GHz 25MB 1866MHz 95W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	10 GbE Embedded	1 used / 2 max
8737-64x	1x E5-2670 v2 10C 2.5GHz 25MB 1866MHz 115W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	10 GbE Embedded	1 used / 2 max
8737-74x	1x E5-2680 v2 10C 2.8GHz 25MB 1866MHz 115W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	10 GbE Embedded	1 used / 2 max
8737-84x	1x E5-2690 v2 10C 3.0GHz 25MB 1866MHz 130W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	10 GbE Embedded	1 used / 2 max
8737-8Dx	2x E5-2690 v2 10C 3.0GHz 25MB 1866MHz 130W	16x 16 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open§	10 GbE Embedded	1 used / 2 max
8737-94x	1x E5-2697 v2 12C 2.7GHz 30MB 1866MHz 130W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	10 GbE Embedded	1 used / 2 max
Models with Flex System CN4022 2-port 10Gb Converged Adapter							
8737-1Mx	1x E5-2609 v2 4C 2.5GHz 10MB 1333MHz 80W	1x 8 GB (1333 MHz)	LSI SAS2004	2x 2.5-inch hot-swap	Open	CN4022 Adapter	1 used / 2 max
8737-2Mx	1x E5-2620 v2 6C 2.1GHz 15MB 1600MHz 80W	1x 8 GB 1600 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	CN4022 Adapter	1 used / 2 max
8737-BMx	1x E5-2630 v2 6C 2.6GHz 15MB 1600MHz 80W	1x 8 GB 1600 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	CN4022 Adapter	1 used / 2 max

\* Processor detail: Processor quantity, model, cores, core speed, L3 cache, memory speed, power TDP rating.

† The 2.5-inch drive bays can be replaced and expanded with 1.8" solid-state drive bays and a ServeRAID M5115 RAID controller to support up to eight 1.8-inch SSDs.

‡ Models have the following Ethernet controllers standard:

- The x4x models include an Embedded 10Gb Virtual Fabric Ethernet controller; connections are routed using a Fabric Connector. The Fabric Connector precludes the use of an I/O adapter in I/O connector 1.
- The xMx models include an Flex System CN4022 2-port 10Gb Converged Adapter in slot 1.

§ Model 8Dx includes 1x Flex System x240 USB Enablement Kit, 1x USB Memory Key for VMware ESXi 5.1, and 1x Blank USB Memory Key for VMware ESXi Downloads.



Table 2. Standard models (Part 2)

Model	Intel Xeon Processor (2 maximum)*	Memory	Disk adapter	Disk bays†	Disks	10 GbE‡	I/O slots
8737-3Mx	1x E5-2640 v2 8C 2.0GHz 20MB 1600MHz 95W	1x 8 GB 1600 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	CN4022 Adapter	1 used / 2 max
8737-4Mx	1x E5-2650 v2 8C 2.6GHz 20MB 1866MHz 95W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	CN4022 Adapter	1 used / 2 max
8737-CMx	1x E5-2650L v2 10C 1.7GHz 25MB 1600MHz 70W	1x 8 GB 1600 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	CN4022 Adapter	1 used / 2 max
8737-5Mx	1x E5-2660 v2 10C 2.2GHz 25MB 1866MHz 95W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	CN4022 Adapter	1 used / 2 max
8737-6Mx	1x E5-2670 v2 10C 2.5GHz 25MB 1866MHz 115W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	CN4022 Adapter	1 used / 2 max
8737-7Mx	1x E5-2680 v2 10C 2.8GHz 25MB 1866MHz 115W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	CN4022 Adapter	1 used / 2 max
8737-8Mx	1x E5-2690 v2 10C 3.0GHz 25MB 1866MHz 130W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	CN4022 Adapter	1 used / 2 max
8737-9Mx	1x E5-2697 v2 12C 2.7GHz 30MB 1866MHz 130W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	CN4022 Adapter	1 used / 2 max
Models without networking standard							
8737-22x	1x E5-2620 v2 6C 2.1GHz 15MB 1600MHz 80W	1x 8 GB 1600 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	Optional	0 used / 2 max
8737-42x	1x E5-2650 v2 8C 2.6GHz 20MB 1866MHz 95W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	Optional	0 used / 2 max
8737-62x	1x E5-2670 v2 10C 2.5GHz 25MB 1866MHz 115W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	Optional	0 used / 2 max
8737-72x	1x E5-2680 v2 10C 2.8GHz 25MB 1866MHz 115W	1x 8 GB 1866 MHz	LSI SAS2004	2x 2.5-inch hot-swap	Open	Optional	0 used / 2 max

\* Processor detail: Processor quantity, model, cores, core speed, L3 cache, memory speed, power TDP rating.

† The 2.5-inch drive bays can be replaced and expanded with 1.8" solid-state drive bays and a ServeRAID M5115 RAID controller to support up to eight 1.8-inch SSDs.

‡ Models have the following Ethernet controllers standard:

- The x4x models include an Embedded 10Gb Virtual Fabric Ethernet controller; connections are routed using a Fabric Connector. The Fabric Connector precludes the use of an I/O adapter in I/O connector 1.
- The xMx models include a Flex System CN4022 2-port 10Gb Converged Adapter in slot 1.

§ Model 8Dx includes 1x Flex System x240 USB Enablement Kit, 1x USB Memory Key for VMware ESXi 5.1, and 1x Blank USB Memory Key for VMware ESXi Downloads.

## TopSeller models

The following table lists the available TopSeller models.

Table 3. TopSeller models

Model	Intel Xeon Processor (2 maximum)*	Memory	Disk adapter	Disk bays†	Disks	10 GbE	I/O slots
TopSeller models - North America							
8737-E1x	2x E5-2620 v2 6C 2.1GHz 15MB 1600MHz 80W	2x 16 GB 1600 MHz	LSI SAS3004	2.5" hot-swap (0 / 2)	Open	2x 10 Gb + FCoE‡	1 / 2
8737-E2x	2x E5-2640 v2 8C 2.0GHz 20MB 1600MHz 95W	4x 16 GB 1600 MHz	LSI SAS3004	2.5" hot-swap (0 / 2)	Open	2x 10 Gb + FCoE‡	1 / 2
8737-E3x	2x E5-2660 v2 10C 2.2GHz 25MB 1866MHz 95W	4x 16 GB 1600 MHz	LSI SAS3004	2.5" hot-swap (0 / 2)	Open	2x 10 Gb + FCoE‡	1 / 2
8737-E4x	2x E5-2680 v2 10C 2.8GHz 25MB 1866MHz 115W	8x 16 GB 1600 MHz	LSI SAS3004	2.5" hot-swap (0 / 2)	Open	2x 10 Gb + FCoE‡	1 / 2

\* Processor detail: Processor quantity, model, cores, core speed, L3 cache, memory speed, power TDP rating.

† The 2.5-inch drive bays can be replaced and expanded with 1.8" solid-state drive bays and a ServeRAID M5115 RAID controller to support up to eight 1.8-inch SSDs.

‡ These models have an onboard 10 GbE controller with two 10 GbE ports plus Virtual Fabric Advanced Software Upgrade (LOM) to enable iSCSI and FCoE

## Chassis support

The x240 is supported in the Flex System Enterprise Chassis.

Up to 14 x240 Compute Nodes can be installed in the chassis, however, the actual number that can be installed in a chassis depends on these factors:

- The TDP power rating for the processors that are installed in the x240
- The number of power supplies installed in the chassis
- The capacity of the power supplies installed (2100 W or 2500 W)
- The chassis power redundancy policy used (N+1 or N+N)

The following table provides guidelines about what number of x240 Compute Nodes can be installed. For more guidance, use the Power Configurator, found at the following website:

<http://ibm.com/systems/bladecenter/resources/powerconfig.html>

In the table:

- Green = No restriction to the number of x240 Compute Nodes that are installable
- Yellow = Some bays must be left empty in the chassis

Table 4. Maximum number of x240 Compute Nodes installable based on power supplies installed and power redundancy policy used

x240 TDP rating	2100 W power supplies installed				2500 W power supplies installed			
	N+1, N=5 6 power supplies	N+1, N=4 5 power supplies	N+1, N=3 5 power supplies	N+N, N=3 6 power supplies	N+1, N=5 6 power supplies	N+1, N=4 5 power supplies	N+1, N=3 4 power supplies	N+N, N=3 6 power supplies
60 W	14	14	14	14	14	14	14	14
70 W	14	14	13	14	14	14	14	14
80 W	14	14	13	13	14	14	14	14
95 W	14	14	12	12	14	14	14	14
115 W	14	14	11	12	14	14	14	14
130 W	14	14	11	11	14	14	13	14
135 W	14	14	10	11	14	14	13	14

## Processor options

The x240 supports the processor options listed in the following table. The server supports one or two processors. The table also shows which server models have each processor standard, if any.

Table 5. Processor options

Part number	Feature code*	Intel Xeon processor description	Models where used
00Y2850	A4P9 / A4PW	Intel Xeon E5-2603 v2 4C 1.8GHz 10MB 1333MHz 80W	-
00Y2851	A4PA / A4PX	Intel Xeon E5-2609 v2 4C 2.5GHz 10MB 1333MHz 80W	14x, 1Mx
00AE510	A4PQ / A4QB	Intel Xeon E5-2618L v2 6C 2.0GHz 15MB 1333MHz 50W (EMB)	-
00Y2852	A4PB / A4PY	Intel Xeon E5-2620 v2 6C 2.1GHz 15MB 1600MHz 80W	24x, 2Mx, 22x
00AE513	A4PT / A4QE	Intel Xeon E5-2628L v2 8C 2.2GHz 20MB 1600MHz 70W (EMB)	-
00Y2853	A4PC / A4PZ	Intel Xeon E5-2630 v2 6C 2.6GHz 15MB 1600MHz 80W	B4x, BMx
00Y2864	A4PN / A4Q9	Intel Xeon E5-2630L v2 6C 2.4GHz 15MB 1600MHz 60W	-
00Y2861	A4PK / A4Q6	Intel Xeon E5-2637 v2 4C 3.5GHz 15MB 1866MHz 130W	-
00Y2854	A4PD / A4Q0	Intel Xeon E5-2640 v2 8C 2.0GHz 20MB 1600MHz 95W	34x, 3Mx
00Y2862	A4PL / A4Q7	Intel Xeon E5-2643 v2 6C 3.5GHz 25MB 1866MHz 130W	-
00AE511	A4PR / A4QC	Intel Xeon E5-2648L v2 10C 2.0GHz 25MB 1866MHz 70W (EMB)	-
00Y2855	A4PP / A4Q1	Intel Xeon E5-2650 v2 8C 2.6GHz 20MB 1866MHz 95W	44x, 4Mx, 42x
00Y2865	A4PE / A4QA	Intel Xeon E5-2650L v2 10C 1.7GHz 25MB 1600MHz 70W	C4x, CMx
00AE512	A4PS / A4QD	Intel Xeon E5-2658 v2 10C 2.4GHz 25MB 1866MHz 95W (EMB)	-
00Y2856	A4PF / A4Q2	Intel Xeon E5-2660 v2 10C 2.2GHz 25MB 1866MHz 95W	54x, 5Mx
00Y2863	A4PM / A4Q8	Intel Xeon E5-2667 v2 8C 3.3GHz 25MB 1866MHz 130W**	-
00Y2857	A4PG / A4Q3	Intel Xeon E5-2670 v2 10C 2.5GHz 25MB 1866MHz 115W	64x, 6Mx, 62x
00Y2858	A4PH / A4Q4	Intel Xeon E5-2680 v2 10C 2.8GHz 25MB 1866MHz 115W	74x, 7Mx, 72x
00Y2859	A4PJ / A4Q5	Intel Xeon E5-2690 v2 10C 3.0GHz 25MB 1866MHz 130W	84x, 8Dx, 8Mx
00Y2848	A4P7 / A4PU	Intel Xeon E5-2695 v2 12C 2.4GHz 30MB 1866MHz 115W	-
00Y2849	A4P8 / A4PV	Intel Xeon E5-2697 v2 12C 2.7GHz 30MB 1866MHz 130W	94x, 9Mx

\* The first feature code is for processor 1 and second feature code is for processor 2.

\*\* Use of the Intel Xeon E5-2667 v2 processor in the Flex System x240 Compute Node is limited to 30 °C up to 3000 feet (914 m). Above 3000 feet, a de-rating of 1 °C for every 600 feet (182 m) should be applied. Use of the ServeRAID M5115 SAS/SATA RAID Controller with the E5-2667 v2 processor is not supported. Flex System configurations using the E5-2667 v2 processor will operate at acoustic levels significantly greater than typical Flex System levels, and the following noise hazard warning may apply:

"Notice: Government regulations (such as those prescribed by OSHA or European Community Directives) may govern noise level exposure in the workplace and may apply to you and your server installation. The actual sound pressure levels in your installation depend upon a variety of factors, including the number of racks in the installation; the size, materials, and configuration of the room; the noise levels from other equipment; the room ambient temperature, and employees' location in relation to the equipment. Further, compliance with such government regulations also depends upon a variety of additional factors, including the duration of employees' exposure and whether employees wear hearing protection. Lenovo recommends that you consult with qualified experts in this field to determine whether you are in compliance with the applicable regulations."

## Memory options

DDR3 memory is compatibility tested and tuned for optimal performance and throughput. Memory specifications are integrated into the light path diagnostics for immediate system performance feedback and optimum system uptime. From a service and support standpoint, memory automatically assumes the system warranty, and Lenovo provides service and support worldwide.

The following table lists memory options available for the x240 compute node with E5-2600 v2 processors. DIMMs can be installed one at a time, but for performance reasons, install them in sets of four (one for each of the four memory channels).

Table 6. Memory options for the x240 with E5-2600 v2 processors

Part number	Feature code	Description	Models where used
Registered DIMMs (RDIMMs) - 1866 MHz			
00D5048	A3QL	16GB (1x16GB, 2Rx4, 1.5V) PC3-14900 CL13 ECC DDR3 1866MHz LP RDIMM	8Dx
00D5040	A3QJ	8GB (1x8GB, 2Rx8, 1.5V) PC3-14900 CL13 ECC DDR3 1866MHz LP RDIMM	All other 1866 MHz models
00D5028	A3QF	4GB (1x4GB, 2Rx8, 1.5V) PC3-14900 CL13 ECC DDR3 1866MHz LP RDIMM	-
Registered DIMMs (RDIMMs) - 1600 MHz			
46W0672	A3QM	16GB (1x16GB, 2Rx4, 1.35V) PC3L-12800 CL11 ECC DDR3 1600MHz LP RDIMM	-
00D5036	A3QH	8GB (1x8GB, 1Rx4, 1.35V) PC3L-12800 CL11 ECC DDR3 1600MHz LP RDIMM	All 1600 MHz models
00D5044	A3QK	8GB (1x8GB, 2Rx8, 1.35V) PC3L-12800 CL11 ECC DDR3 1600MHz LP RDIMM	-
00D5024	A3QE	4GB (1x4GB, 1Rx4, 1.35V) PC3L-12800 CL11 ECC DDR3 1600MHz LP RDIMM	-
Unbuffered DIMMs (UDIMMs)			
00D5016	A3QC	8GB (1x8GB, 2Rx8, 1.35V) PC3L-12800 CL11 ECC DDR3 1600MHz LP UDIMM	-
00D5012	A3QB	4GB (1x4GB, 2Rx8, 1.35V) PC3L-12800 CL11 ECC DDR3 1600MHz LP UDIMM	-
Load-reduced DIMMs (LRDIMMs)			
46W0761	A47K	32GB (1x32GB, 4Rx4, 1.5V) PC3-14900 CL13 ECC DDR3 1866MHz LP LRDIMM	-

The x240 supports Low Profile (LP) DDR3 memory RDIMMs, UDIMMs, and LRDIMMs. The server supports up to 12 DIMMs when one processor is installed and up to 24 DIMMs when two processors are installed. Each processor has four memory channels, and there are three DIMMs per channel.

The following rules apply when selecting the memory configuration:

- Mixing 1.5 V and 1.35 V DIMMs in the same server is supported. In such a case all DIMMs operate at 1.5 V.
- Mixing of different types of DIMMs (UDIMM , RDIMM and LRDIMM) in the same server is not supported.
- The maximum number of ranks supported per channel is eight.
- The maximum quantity of DIMMs that can be installed in the server depends on the number of CPUs, DIMM rank, and operating voltage, as shown in the "Max. qty supported" row in the following table. The shaded cells indicate that the DIMM type supports the maximum number of DIMMs (24 for the x240)
- All DIMMs in all CPU memory channels operate at the same speed, which is determined as the lowest value of:
  - Memory speed supported by specific CPU
  - Lowest maximum operating speed for the selected memory configuration that depends on rated speed, as shown under the "Max. operating speed" section in the following table. The shaded cells indicate that the speed indicated is the maximum that the DIMM allows.

The following two tables (Part 1 and Part 2) show the maximum memory speeds that are achievable based on the installed DIMMs and the number of DIMMs per channel. The tables also show maximum memory capacity at any speed supported by the DIMM and maximum memory capacity at rated DIMM speed. In the tables, cells highlighted with a gray background indicate when the specific combination of DIMM voltage and number of DIMMs per channel still allows the DIMMs to operate at rated speed.

Table 7. Maximum memory speeds (Part 1 - UDIMMs and LRDIMMs)

Specification	UDIMMs		LRDIMMs
Rank	Dual rank		Quad rank
Part numbers	00D5012 (4 GB) 00D5016 (8 GB)		46W0761 (32 GB)
Rated speed	1600 MHz		1866 MHz
Rated voltage	1.35 V		1.5 V
Operating voltage	1.35 V	1.5 V	1.5 V
Maximum quantity*	16	16	24
Largest DIMM	8 GB	8 GB	32 GB
Max memory capacity	128 GB	128 GB	768 GB
Max memory at rated speed	None	128 GB	512 GB
<b>Maximum operating speed (MHz)</b>			
One DIMM per channel	1333 MHz	1600 MHz	1866 MHz
Two DIMMs per channel	1333 MHz	1600 MHz	1866 MHz
Three DIMMs per channel	NS†	NS†	1333 MHz

\* The maximum quantity supported is shown for two processors installed. When one processor is installed, the maximum quantity supported is half of that shown.

† NS = Not supported. UDIMMs only support up to 2 DIMMs per channel.

Table 8. Maximum memory speeds (Part 2 - Single-rank and dual-rank RDIMMs)

Specification	RDIMMs				
Rank	Single rank		Dual rank		
Part numbers	00D5024 (4 GB) 00D5036 (8 GB)		00D5044 (8 GB) 46W0672 (16 GB)		00D5028 (4 GB) 00D5040 (8 GB) 00D5048 (16 GB)
Rated speed	1600 MHz		1600 MHz		1866 MHz
Rated voltage	1.35 V		1.35 V		1.5 V
Operating voltage	1.35 V	1.5 V	1.35 V	1.5 V	1.5 V
Max quantity†	24	24	24	24	24
Largest DIMM	8 GB	8 GB	16 GB	16 GB	16 GB
Max memory capacity	192 GB	192 GB	384 GB	384 GB	384 GB
Max memory at rated speed	None	128 GB	None	256 GB	256 GB
<b>Maximum operating speed (MHz)</b>					
One DIMM per channel	1333 MHz	1600 MHz	1333 MHz	1600 MHz	1866 MHz
Two DIMMs per channel	1333 MHz	1600 MHz	1333 MHz	1600 MHz	1866 MHz
Three DIMMs per channel	1066 MHz	1066 MHz	1066 MHz	1333 MHz / 1066 MHz*	1333 MHz / 1066 MHz**

† The maximum quantity that is supported is shown for two processors installed. When one processor is installed, the maximum quantity that is supported is half of that shown.

\* 00D5044 (8 GB) operates at 1066 MHz at three DIMMs per channel; 46W0672 (16 GB) operates at 1333 MHz at three DIMMs per channel

\*\* 00D5028 (4 GB) and 00D5040 (8 GB) operate at 1066 MHz at three DIMMs per channel; 00D5048 (16 GB) operates at 1333 MHz at three DIMMs per channel

The following memory protection technologies are supported:

- ECC
- Chipkill (for x4-based memory DIMMs -- look for "x4" in the DIMM description)
- Memory mirroring
- Memory sparing

If memory mirroring is used, then DIMMs must be installed in pairs (minimum of one pair per CPU), and both DIMMs in a pair must be identical in type and size.

If memory rank sparing is used, then a minimum of one quad-rank DIMM or two single-rank or dual-rank DIMMs must be installed per populated channel (the DIMMs do not need being identical). In rank sparing mode, one rank of a DIMM in each populated channel is reserved as spare memory. The size of a rank varies depending on the DIMMs installed.

## Internal storage

The x240 server has two 2.5-inch hot-swap drive bays accessible from the front of the blade server (Figure 2). These bays connect to the integrated LSI SAS2004 6 Gbps SAS/SATA RAID-on-Chip (ROC) controller.

The integrated LSI SAS2004 ROC has the following features:

- Four-port LSI SAS2004 controller with 6 Gbps throughput per port
- PCIe x4 Gen 2 host interface
- Two SAS ports routed internally to the two hot-swap drive bays
- Supports RAID-0, RAID-1 and RAID-1E

The x240 also supports up to eight 1.8-inch drives with the addition of the ServeRAID M5115 controller and additional SSD tray hardware. These are described in the next section.

Supported drives are listed in the Internal drive options section.

## ServeRAID M5115 SAS/SATA controller

The x240 supports up to eight 1.8-inch solid-state drives combined with a ServeRAID M5115 SAS/SATA controller (90Y4390). The M5115 attaches to the I/O adapter 1 connector and can be attached even if the Compute Node Fabric Connector is installed (used to route the Embedded 10Gb Virtual Fabric Adapter to bays 1 and 2, as discussed in "I/O expansion options"). The ServeRAID M5115 cannot be installed if an adapter is installed in I/O adapter slot 1.

The ServeRAID M5115 supports combinations of 2.5-inch drives and 1.8-inch solid state drives:

- Up to two 2.5-inch drives only
- Up to four 1.8-inch drives only
- Up to two 2.5-inch drives, plus up to four 1.8-inch solid state drives
- Up to eight 1.8-inch solid state drives

The ServeRAID M5115 SAS/SATA Controller (90Y4390) provides an advanced RAID controller supporting RAID 0, 1, 10, 5, 50, and optional 6 and 60. It includes 1 GB of cache, which can be backed up to Flash when attached to the supercapacitor included with the optional ServeRAID M5100 Series Enablement Kit (90Y4342).

At least one hardware kit is required with the ServeRAID M5115 controller, and there are three hardware kits that are supported that enable specific drive support.

Table 9. ServeRAID M5115 and hardware kits

Part number	Feature code	Description	Maximum supported
90Y4390	A2XW	ServeRAID M5115 SAS/SATA Controller for Flex System	1
90Y4342	A2XX	ServeRAID M5100 Series Enablement Kit for Flex System x240	1
47C8808	A47D	ServeRAID M5100 Series Flex System Flash Kit v2 for x240	1
90Y4391	A2XZ	ServeRAID M5100 Series SSD Expansion Kit for Flex System x240	1



The hardware kits have the following features:

- **ServeRAID M5100 Series Enablement Kit for Flex System x240** (90Y4342) enables support for up to two 2.5" HDDs or SSDs in the hot-swap bays in the front of the server. It includes a CacheVault unit, which enables MegaRAID CacheVault flash cache protection. This enablement kit replaces the standard two-bay backplane (which is attached via the planar to an onboard controller) with a new backplane that attaches to an included flex cable to the M5115 controller. It also includes an air baffle, which also serves as an attachment for the CacheVault unit.

MegaRAID CacheVault flash cache protection uses NAND flash memory powered by a supercapacitor to protect data stored in the controller cache. This module eliminates the need for a lithium-ion battery commonly used to protect DRAM cache memory on PCI RAID controllers. To avoid the possibility of data loss or corruption during a power or server failure, CacheVault technology transfers the contents of the DRAM cache to NAND flash using power from the supercapacitor. After the power is restored to the RAID controller, the saved data is transferred from the NAND flash back to the DRAM cache, which can then be flushed to disk.

**Tip:** The Enablement Kit is only required if 2.5-inch drives are to be used. If you plan to install four or eight 1.8-inch SSDs only, then this kit is not required.

- **ServeRAID M5100 Series Flex System Flash Kit v2 for x240** (47C8808) enables support for up to four 1.8-inch SSDs. This kit replaces the standard two-bay backplane with a four-bay SSD backplane that attaches to an included flex cable to the M5115 controller. Because only SSDs are supported, a CacheVault unit is not required, and therefore this kit does not have a supercap. This v2 kit provides support for the latest high-performance SSDs.

**Note:** The original ServeRAID M5100 Series Flex System Flash Kit for x240, 90Y4341 is not supported.

- **ServeRAID M5100 Series SSD Expansion Kit for Flex System x240** (90Y4391) enables support for up to four internal 1.8-inch SSDs. This kit includes two air baffles, left and right, which can attach two 1.8-inch SSD attachment locations and Flex cables for attachment to up to four 1.8-inch SSDs.

**Note:** The SSD Expansion Kit cannot be installed if the USB Enablement Kit, 49Y8119, is already installed as these kits occupy the same location in the server.

The following table shows the kits required for each combination of drives. For example, if you plan to install eight 1.8-inch SSDs, then you will need the M5115 controller, the Flash kit, and the SSD Expansion kit.

Table 10. ServeRAID M5115 hardware kit usage matrix

Desired drive support			Components required			
Maximum number of 2.5" drives	Maximum number of 1.8" SSDs		ServeRAID M5115 90Y4390	Enablement Kit 90Y4342	Flash Kit v2 47C8808	SSD Expansion Kit 90Y4391
2	0	=>	Required	Required		
0	4 (front)	=>	Required		Required	
2	4 (internal)	=>	Required	Required		Required
0	8 (both)	=>	Required		Required	Required

The following figure shows how the ServeRAID M5115 and the Enablement Kit are installed in the server to support two 2.5-inch drives with MegaRAID CacheVault flash cache protection (row 1 of the preceding table).

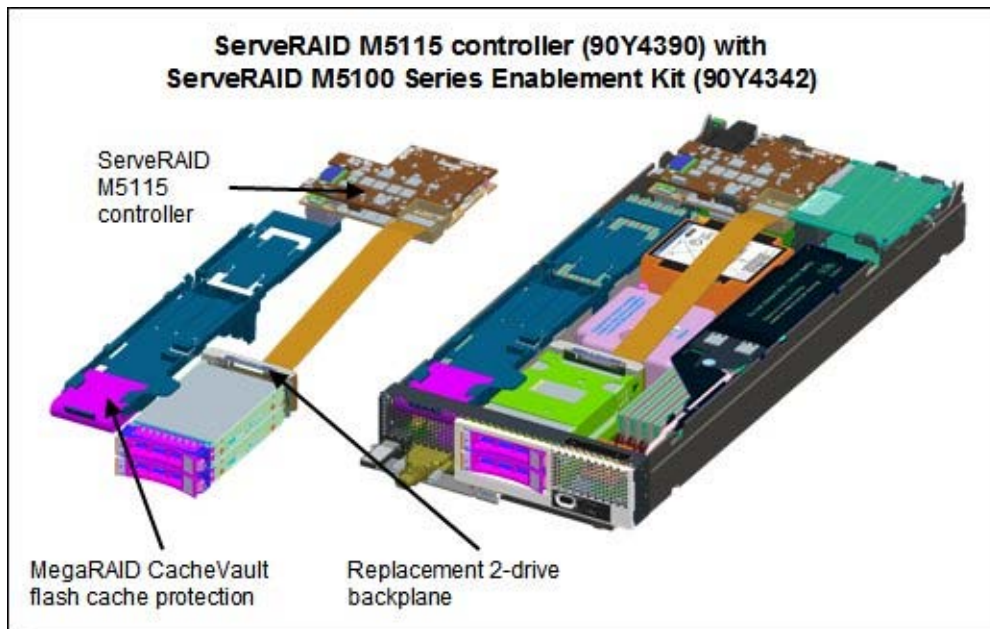


Figure 4. The ServeRAID M5115 and the Enablement Kit installed

The following figure shows how the ServeRAID M5115 and Flash and SSD Expansion Kits are installed in the server to support eight 1.8-inch solid-state drives (row 4 of the preceding table).

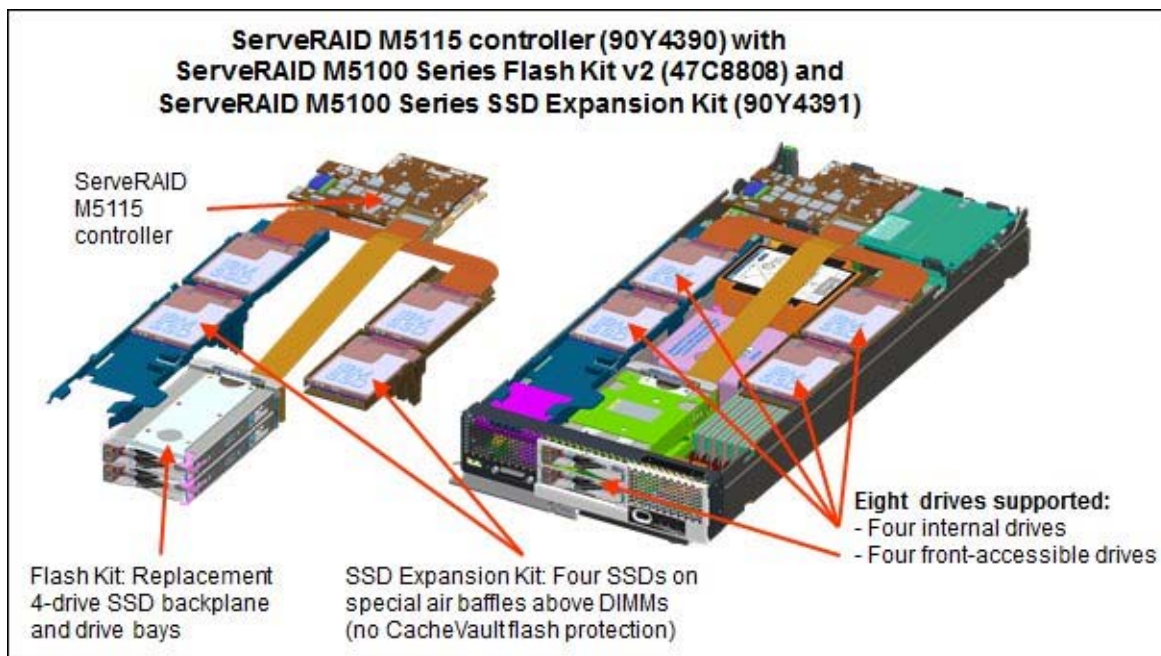


Figure 5. ServeRAID M5115 with Flash and SSD Expansion Kits installed

The eight SSDs are installed in the following locations:

- Four in the front of the system in place of the two 2.5-inch drive bays
- Two in a tray above one of the memory banks for CPU 1
- Two in a tray above one of the memory banks for CPU 2

The ServeRAID M5115 controller has the following specifications:

- Eight internal 6 Gbps SAS/SATA ports
- PCI Express 3.0 x8 host interface
- 6 Gbps throughput per port
- 800 MHz dual-core IBM PowerPC® processor with LSI SAS2208 6 Gbps RAID on Chip (ROC) controller
- Support for RAID levels 0, 1, 10, 5, 50 standard; support for RAID 6 and 60 with optional upgrade using 90Y4411
- Onboard 1 GB data cache (DDR3 running at 1333 MHz) with optional flash backup (MegaRAID CacheVault technology) as part of the Enablement Kit 90Y4342.
- Support for SAS and SATA HDDs and SSDs
- Support for intermixing SAS and SATA HDDs and SSDs; mixing different types of drives in the same array (drive group) not recommended
- Support for self-encrypting drives (SEDs) with MegaRAID SafeStore
- Optional support for SSD performance acceleration with MegaRAID FastPath and SSD caching with MegaRAID CacheCade Pro 2.0 (90Y4447)
- Support for up to 64 virtual drives, up to 128 drive groups, up to 16 virtual drives per one drive group, and up to 32 physical drives per one drive group
- Support for logical unit number (LUN) sizes up to 64 TB
- Configurable stripe size up to 1 MB
- Compliant with Disk Data Format (DDF) configuration on disk (COD)
- S.M.A.R.T. support
- MegaRAID Storage Manager management software

Optional add-ons to the ServeRAID M5115 controller are RAID 6 support, SSD performance accelerator, and SSD caching enabler. The feature upgrades are as listed in the following table. These are all FoD license upgrades.

Table 11. Supported upgrade features

Part number	Feature code	Description	Maximum supported
90Y4410	A2Y1	ServeRAID M5100 Series RAID 6 Upgrade for Flex System	1
90Y4412	A2Y2	ServeRAID M5100 Series Performance Upgrade for Flex System (MegaRAID FastPath)	1
90Y4447	A36G	ServeRAID M5100 Series SSD Caching Enabler for Flex System (MegaRAID CacheCade Pro 2.0)	1

These features are described as follows:

- RAID 6 Upgrade (90Y4410)

Adds support for RAID 6 and RAID 60. This is a Feature on Demand license.

- Performance Upgrade (90Y4412)

The Performance Upgrade for Flex System (implemented using the LSI MegaRAID FastPath software) provides high-performance I/O acceleration for SSD-based virtual drives by exploiting an extremely low-latency I/O path to increase the maximum I/O per second (IOPS) capability of the controller. This feature boosts the performance of applications with a highly random data storage access pattern, such as transactional databases. Part number 90Y4412 is a Feature on Demand license.

- SSD Caching Enabler for traditional hard drives (90Y4447)

The SSD Caching Enabler for Flex System (implemented using the LSI MegaRAID CacheCade Pro 2.0) is designed to accelerate the performance of hard disk drive (HDD) arrays with only an incremental investment in solid-state drive (SSD) technology. The feature enables the SSDs to be configured as a dedicated cache to help maximize the I/O performance for transaction-intensive applications, such as databases and web serving. The feature tracks data storage access patterns and identifies the most frequently accessed data. The hot data is then automatically stored on the SSDs that are assigned as a dedicated cache pool on the ServeRAID controller. Part number 90Y4447 is a Feature on Demand license. This feature requires at least one SSD drive be installed.

**Note:** Not all SSDs support SSD Caching Enabler (CacheCade) feature. See <http://ibm.com/support/entry/portal/docdisplay?Indocid=MIGR-5094754> for details.

## Internal drive options

The 2.5" drive bays support SAS or SATA hard disk drives (HDDs) or SATA solid state drives (SSDs). The following table lists the supported 2.5" drive options.

Table 12. 2.5-inch drive options for internal disk storage (Part 1)

Part number	Feature code	Description	Maximum supported
10K SAS hard disk drives			
00AD075	A48S	1.2TB 10K 6Gbps SAS 2.5" G2HS HDD	2
81Y9650	A282	900GB 10K 6Gbps SAS 2.5" SFF HS HDD	2
90Y8872	A2XD	600GB 10K 6Gbps SAS 2.5" SFF G2HS HDD	2
49Y2003	5433	600GB 10K 6Gbps SAS 2.5" SFF Slim-HS HDD	2
90Y8877	A2XC	300GB 10K 6Gbps SAS 2.5" SFF G2HS HDD	2
42D0637	5599	300GB 10K 6Gbps SAS 2.5" SFF Slim-HS HDD	2
15K SAS hard disk drives			
00AJ300	A4VB	600GB 15K 6Gbps SAS 2.5" G2HS HDD	2
81Y9670	A283	300GB 15K 6Gbps SAS 2.5" SFF HS HDD	2
42D0677	5536	146GB 15K 6Gbps SAS 2.5" SFF Slim-HS HDD	2
90Y8926	A2XB	146GB 15K 6Gbps SAS 2.5" SFF G2HS HDD	2
10K and 15K Self-encrypting drives (SED)			
00AD085	A48T	1.2TB 10K 6Gbps SAS 2.5" G2HS SED	2
81Y9662	A3EG	900GB 10K 6Gbps SAS 2.5" SFF G2HS SED	2
90Y8913	A2XF	300GB 10K 6Gbps SAS 2.5" SFF G2HS SED	2
90Y8944	A2ZK	146GB 15K 6Gbps SAS 2.5" SFF G2HS SED	2
NL SAS			
81Y9690	A1P3	1TB 7.2K 6Gbps NL SAS 2.5" SFF HS HDD	2
90Y8953	A2XE	500GB 7.2K 6Gbps NL SAS 2.5" SFF G2HS HDD	2
42D0707	5409	500GB 7200 6Gbps NL SAS 2.5" SFF Slim-HS HDD	2
NL SATA			
81Y9722	A1NX	250GB 7.2K 6Gbps NL SATA 2.5" SFF HS HDD	2
81Y9726	A1NZ	500GB 7.2K 6Gbps NL SATA 2.5" SFF HS HDD	2
81Y9730	A1AV	1TB 7.2K 6Gbps NL SATA 2.5" SFF HS HDD	2
10K and 15K SAS-SSD Hybrid drive			
00AD102	A4G7	600GB 10K 6Gbps SAS 2.5" G2HS Hybrid	2

Table 12. 2.5-inch drive options for internal disk storage (Part 2)

Part number	Feature code	Description	Maximum supported
Solid-state drives - Enterprise			
41Y8341	A4FQ	S3700 800GB SATA 2.5" MLC HS Enterprise SSD	2
41Y8336	A4FN	S3700 400GB SATA 2.5" MLC HS Enterprise SSD	2
41Y8331	A4FL	S3700 200GB SATA 2.5" MLC HS Enterprise SSD	2
49Y6195	A4GH	1.6TB SAS 2.5" MLC HS Enterprise SSD	2
49Y6139	A3F0	800GB SAS 2.5" MLC HS Enterprise SSD	2
49Y6134	A3EY	400GB SAS 2.5" MLC HS Enterprise SSD	2
00W1125	A3HR	100GB SATA 2.5" MLC HS Enterprise SSD	2
Solid-state drives - Enterprise Value			
00AJ000	A4KM	S3500 120GB SATA 2.5" MLC HS Enterprise Value SSD	2
00AJ005	A4KN	S3500 240GB SATA 2.5" MLC HS Enterprise Value SSD	2
00AJ010	A4KP	S3500 480GB SATA 2.5" MLC HS Enterprise Value SSD	2
00AJ015	A4KQ	S3500 800GB SATA 2.5" MLC HS Enterprise Value SSD	2
00FN268	A5U4	S3500 1.6TB SATA 2.5" MLC HS Enterprise Value SSD	2
00AJ355	A56Z	120GB SATA 2.5" MLC HS Enterprise Value SSD	2
00AJ360	A570	240GB SATA 2.5" MLC HS Enterprise Value SSD	2
00AJ365	A571	480GB SATA 2.5" MLC HS Enterprise Value SSD	2
00AJ370	A572	800GB SATA 2.5" MLC HS Enterprise Value SSD	2

The 1.8-inch solid state drives supported are listed in the following table. The use of 1.8-inch drives requires the ServeRAID M5115 SAS/SATA controller as described in the next section.

Table 13. Supported 1.8-inch solid state drives

Part number	Feature code	Description	Maximum supported
<b>Enterprise SSDs</b>			
49Y6119	A3AN	200GB SATA 1.8" MLC Enterprise SSD	8
49Y6124	A3AP	400GB SATA 1.8" MLC Enterprise SSD	8
00W1120	A3HQ	100GB SATA 1.8" MLC Enterprise SSD	8
41Y8366	A4FS	S3700 200GB SATA 1.8" MLC Enterprise SSD	8
41Y8371	A4FT	S3700 400GB SATA 1.8" MLC Enterprise SSD	8
<b>Enterprise Value SSDs</b>			
00AJ040	A4KV	S3500 80GB SATA 1.8" MLC Enterprise Value SSD	8
00AJ045	A4KW	S3500 240GB SATA 1.8" MLC Enterprise Value SSD	8
00AJ050	A4KX	S3500 400GB SATA 1.8" MLC Enterprise Value SSD	8
00AJ455	A58U	S3500 800GB SATA 1.8" MLC Enterprise Value SSD	8
00AJ335	A56V	120GB SATA 1.8" MLC Enterprise Value SSD	8
00AJ340	A56W	240GB SATA 1.8" MLC Enterprise Value SSD	8
00AJ345	A56X	480GB SATA 1.8" MLC Enterprise Value SSD	8
00AJ350	A56Y	800GB SATA 1.8" MLC Enterprise Value SSD	8

## Flex System Storage Expansion Node

The x240 supports the attachment of the Flex System Storage Expansion Node. The Flex System Storage Expansion Node provides the ability to attach additional 12 hot-swap 2.5-inch HDDs or SSDs locally to the attached compute node. The Storage Expansion Node provides storage capacity for Network Attach Storage (NAS) workloads, providing flexible storage to match capacity, performance and reliability needs.

Model 8737-HBx includes the Storage Expansion Node as standard as listed in Table 2. All other models support the SEN as an option.

The following figure shows the Flex System Storage Expansion Node attached to a compute node.



Figure 6. Flex System Storage Expansion Node (right) attached to a compute node (left)

The ordering information for the Storage Expansion Node is shown in the following table.

Table 14. Ordering part number and feature code

Part number	Feature code*	Description	Maximum supported
68Y8588	A3JF	Flex System Storage Expansion Node	1

The Storage Expansion Node has the following features:

- Connects directly to supported compute nodes via a PCIe 3.0 interface to the compute node's expansion connector (See Figure 3)
- Support for 12 hot-swap 2.5-inch drive, accessible via a sliding tray
- Support for 6 Gbps SAS and SATA drives, both HDDs and SSDs
- Based on an LSI SAS2208 6 Gbps RAID on Chip (ROC) controller
- Supports RAID 0, 1, 5, 10, and 50 as standard. JBOD also supported. Optional RAID 6 and 60 with a Features on Demand upgrade.
- Optional 512 MB or 1 GB cache with cache-to-flash super capacitor offload

**Note:** The use of the Storage Expansion Node requires that the x240 Compute Node have both processors installed.

For more information, see the Product Guide on the Flex System Storage Expansion Node, <http://www.redbooks.ibm.com/abstracts/tips0914.html?Open>



## Internal tape drives

The server does not support an internal tape drive. However, it can be attached to external tape drives using Fibre Channel connectivity.

## Optical drives

The server does not support an internal optical drive option, however, you can connect an external USB optical drive. See <http://support.lenovo.com/en/documents/pd011281> for information about available external optical drives from Lenovo.

**Note:** The USB port on the compute nodes supply up to 0.5 A at 5 V. For devices that require more power, an additional power source will be required.

## Embedded 10Gb Virtual Fabric Adapter

Some models of the x240 -- those with a model of the form 8737-x4x -- include an Embedded 10Gb Virtual Fabric Adapter (VFA, also known as LAN on Motherboard or LOM) built into the system board. Table 2 lists the models of the x240 include the Embedded 10Gb Virtual Fabric Adapter. Each x240 model that includes the embedded 10Gb VFA also has the Compute Node Fabric Connector installed in I/O connector 1 (and physically screwed onto the system board) to provide connectivity to the Enterprise Chassis midplane. Figure 3 shows the location of the Fabric Connector.

The Fabric Connector enables port 1 on the embedded 10Gb VFA to be routed to I/O module bay 1 and port 2 to be routed to I/O module bay 2. The Fabric Connector can be unscrewed and removed, if required, to allow the installation of an I/O adapter on I/O connector 1.

The Embedded 10Gb VFA is based on the Emulex BladeEngine 3R (BE3R), which is a single-chip, dual-port 10 Gigabit Ethernet (10GbE) Ethernet Controller.

These are some of the features of the Embedded 10Gb VFA:

- PCI-Express Gen2 x8 host bus interface
- Supports connection to 10 Gb and 1 Gb Flex System Ethernet switches
- Supports multiple virtual NIC (vNIC) functions
- TCP/IP Offload Engine (TOE enabled)
- SR-IOV capable
- RDMA over TCP/IP capable
- iSCSI and FCoE upgrade offering via FoD

The following table lists the ordering information for the IBM Virtual Fabric Advanced Software Upgrade (LOM), which enables the iSCSI and FCoE support on the Embedded 10Gb Virtual Fabric Adapter.

Table 15. Feature on Demand upgrade for FCoE and iSCSI support

Part number	Feature code	Description	Maximum supported
90Y9310	A2TD	IBM Virtual Fabric Advanced Software Upgrade (LOM)	1

## CN4022 2-port 10Gb Converged Adapter

Some models of the x240 -- those with a model of the form 8737-xMx -- include the Flex System CN4022 2-port 10Gb Converged Adapter installed in slot 1. Table 2 lists the models with this adapter standard. These models require that a compatible Ethernet switch be installed in I/O module bays 1 and 2 of the chassis.

The features of the CN4022 2-port 10Gb Converged Adapter include the following features:

- One Broadcom BCM57840 ASIC
- Connection to either 1 Gb or 10 Gb data center infrastructure (1 Gb and 10 Gb auto-negotiation)
- PCI Express 3.0 x8 host interface
- Full line-rate performance
- Supports 10 Gb Ethernet, FCoE, and iSCSI out of the box (no Features on Demand upgrade required)
- Supports vNIC - Switch Independent Mode

For details about this adapter, see the Product Guide:

<http://www.redbooks.ibm.com/abstracts/tips1087.html?Open>

## I/O expansion options

The x240 has two I/O expansion connectors for attaching I/O adapter cards. There is a third expansion connector designed to connect an expansion node such as the PCIe Expansion Node. The I/O expansion connectors are a very high-density 216-pin PCIe connector. Installing I/O adapter cards allows the server to connect with switch modules in the Flex System Enterprise Chassis. Each slot has a PCI Express 3.0 x16 host interface and both slots support the same form-factor adapters.

The following figure shows the location of the I/O expansion connectors.

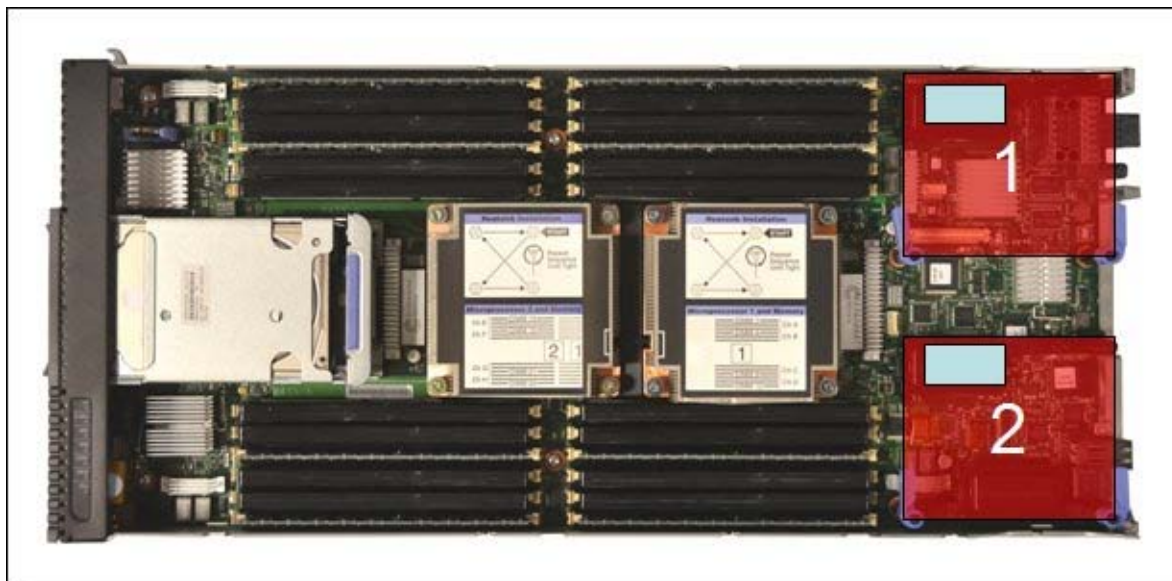


Figure 7. Location of the I/O adapter slots in the Flex System x240 Compute Node

All I/O adapters are the same shape and can be used in any available slot.. A compatible switch or pass-through module must be installed in the corresponding I/O bays in the chassis, as indicated in the following table. Installing two switches means that all ports of the adapter are enabled, which improves performance and network availability.

Table 16. Adapter to I/O bay correspondence

I/O adapter slot in the server	Port on the adapter	Corresponding I/O module bay in the chassis
Slot 1	Port 1	Module bay 1
	Port 2	Module bay 2
	Port 3 (for 4-port cards)	Module bay 1
	Port 4 (for 4-port cards)	Module bay 2
Slot 2	Port 1	Module bay 3
	Port 2	Module bay 4
	Port 3 (for 4-port cards)	Module bay 3
	Port 4 (for 4-port cards)	Module bay 4

The following figure shows the location of the switch bays in the Flex System Enterprise Chassis.

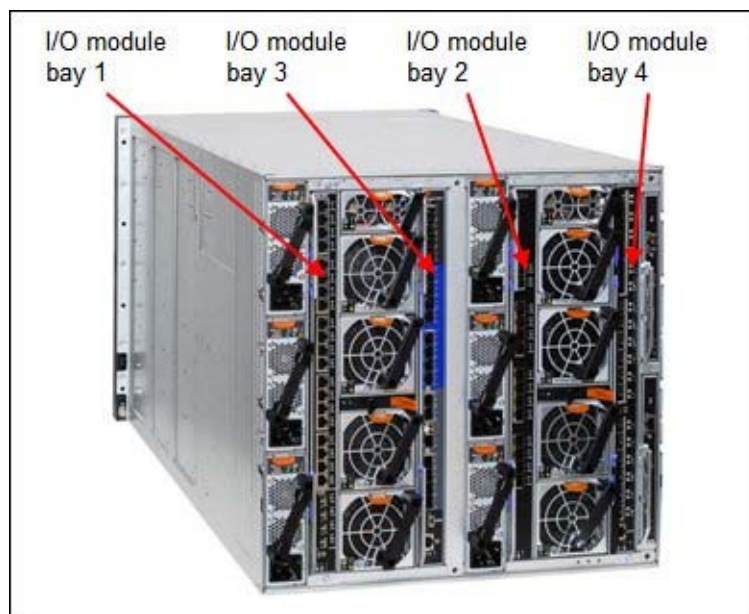


Figure 8. Location of the switch bays in the Flex System Enterprise Chassis

The following figure shows how two-port adapters are connected to switches installed in the chassis.

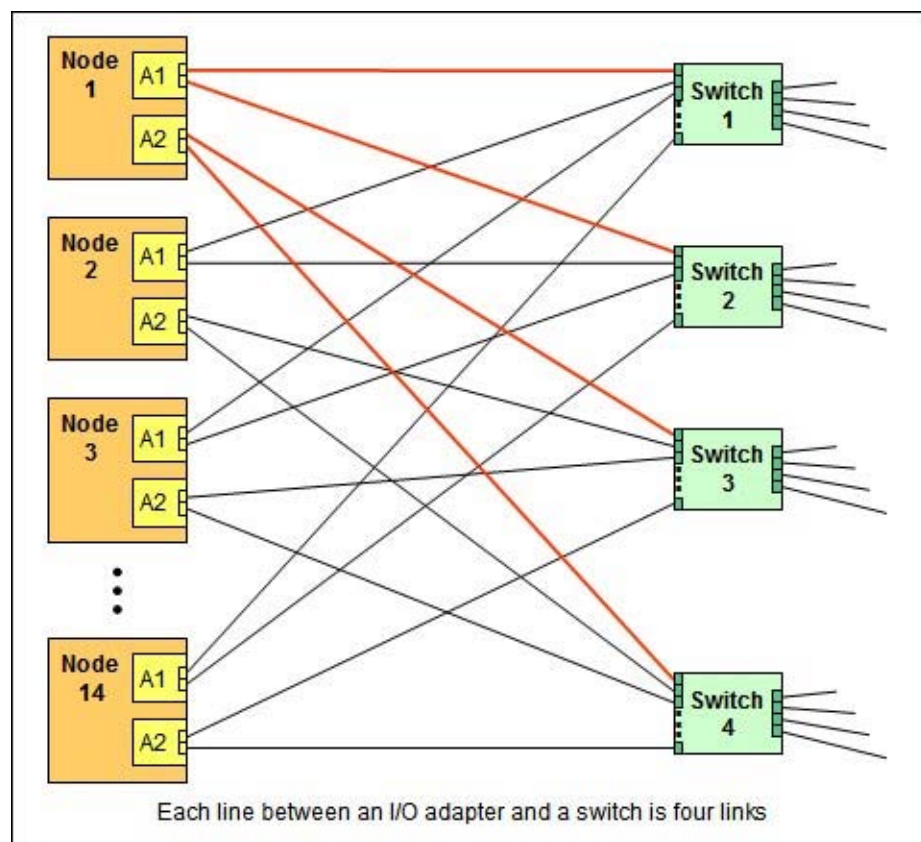


Figure 9. Logical layout of the interconnects between I/O adapters and I/O modules

## Flex System PCIe Expansion Node

The x240 supports the attachment of the Flex System PCIe Expansion Node. The Flex System PCIe Expansion Node provides the ability to attach additional PCI Express cards such as High IOPS SSD adapters, fabric mezzanine cards, and next-generation graphics processing units (GPU) to supported Flex System compute nodes. This capability is ideal for many applications that require high performance I/O, special telecommunications network interfaces, or hardware acceleration using a PCI Express card. The PCIe Expansion Node supports up to four PCIe 2.0 adapters and two additional Flex System expansion adapters.

The PCIe Expansion Node is attached to the x240 as shown in the following figure.

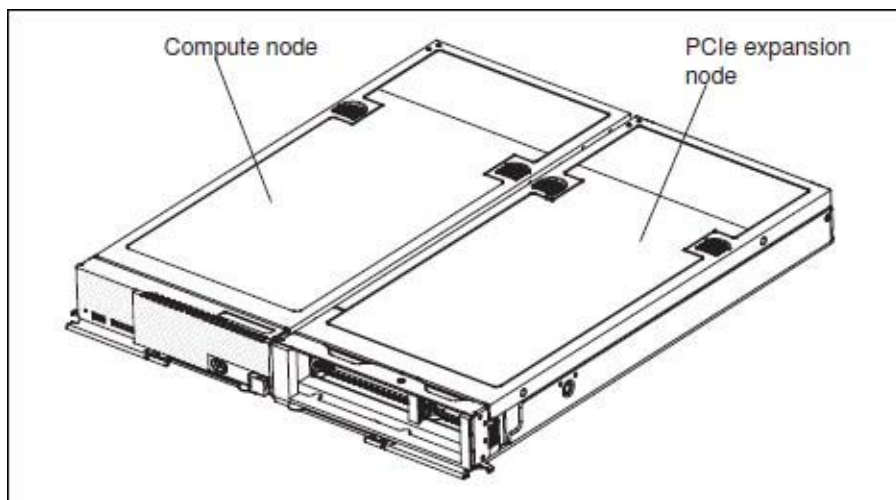


Figure 10. PCIe Expansion Node

The ordering information for the PCIe Expansion Node is shown in the following table.

Table 17. Ordering part number and feature code

Part number	Feature code	Description	Maximum supported
81Y8983	A1BV	Flex System PCIe Expansion Node	1

The PCIe Expansion Node has the following features:

- Support for up to four standard PCIe 2.0 adapters:
  - Two PCIe 2.0 x16 slots that support full-length, full-height adapters
  - Two PCIe 2.0 x8 slots that support half-length, low-profile adapters
- Support for PCIe 3.0 adapters by operating them in PCIe 2.0 mode
- Support for one full-length, full-height double-wide adapter (consuming the space of the two full-length, full-height adapter slots)
- Support for PCIe cards with higher power requirements -- a single adapter card (up to 225W), or to two adapters (up to 150W each)
- Two Flex System I/O expansion connectors for to further expand the I/O capability of the attached compute node.

**Note:** The use of the PCIe Expansion Node requires that the x240 Compute Node have both processors installed.

For more information, see the Product Guide on the Flex System PCIe Expansion Node, <http://www.redbooks.ibm.com/abstracts/tips0906.html?Open>

## Network adapters

As described in "Embedded 10Gb Virtual Fabric Adapter," certain models (those with a model number of the form 8737-x4x or 8737-xDx) have a 10Gb Ethernet controller on the system board, and its ports are routed to the midplane and switches installed in the chassis via a Compute Node Fabric Connector that takes the place of an adapter in I/O slot 1.

Models without the Embedded 10Gb Virtual Fabric Adapter (those with a model number of the form 8737-x2x) do not include any other Ethernet connections to the Enterprise Chassis midplane as standard. Therefore, for those models, an I/O adapter must be installed in either I/O connector 1 or I/O connector 2 to provide network connectivity between the server and the chassis midplane and ultimately to the network switches.

The following table lists the supported network adapters and upgrades. Adapters can be installed in either slot. However, compatible switches must be installed in the corresponding bays of the chassis. All adapters can also be installed in the PCIe Expansion Node. The "Maximum supported" column indicates the number of adapter than can be installed in the server and in the PCIe Expansion Node (PEN).

Table 18. Network adapters

Part number	Feature code	Description	Number of ports	Maximum supported (x240* / PEN)
40 Gb Ethernet				
90Y3482	A3HK	Flex System EN6132 2-port 40Gb Ethernet Adapter	2	2 / None
10 Gb Ethernet				
88Y5920	A4K3	Flex System CN4022 2-port 10Gb Converged Adapter	2	2 / 2
00Y3306	A4K2	Flex System CN4054R 10Gb Virtual Fabric Adapter	4	2 / 2
90Y3558	A1R0	Flex System CN4054 Virtual Fabric Adapter (SW Upgrade) (Feature on Demand to provide FCoE and iSCSI support to the CN4054R) (one license required per adapter)	License	2 / 2
90Y3466	A1QY	Flex System EN4132 2-port 10 Gb Ethernet Adapter	2	2 / 2
1 Gb Ethernet				
49Y7900	A10Y	Flex System EN2024 4-port 1 Gb Ethernet Adapter	4	2 / 2
InfiniBand				
90Y3454	A1QZ	Flex System IB6132 2-port FDR InfiniBand Adapter	2	2 / 2

\* For x4x models (where the Embedded 10Gb Virtual Fabric Adapter standard), and for xMx models (where a CN4022 2-port 10Gb Converged Adapter is standard), only one extra adapter can be installed in the compute node.

For adapter-to-switch compatibility, see the Flex System Interoperability Guide:

<http://www.redbooks.ibm.com/fsig>

## Storage host bus adapters

The following table lists storage HBAs supported by the x240 server, both internally in the compute node and in the PCIe Expansion Node.

Table 19. Storage adapters

Part number	Feature code	Description	Number of ports	Maximum supported (x240* / PEN)
Fibre Channel				
88Y6370	A1BP	Flex System FC5022 2-port 16Gb FC Adapter	2	2 / 2
95Y2386	A45R	Flex System FC5052 2-port 16Gb FC Adapter	2	2 / 2
95Y2391	A45S	Flex System FC5054 4-port 16Gb FC Adapter	4	2 / 2
69Y1942	A1BQ	Flex System FC5172 2-port 16Gb FC Adapter	2	2 / 2
69Y1938	A1BM	Flex System FC3172 2-port 8Gb FC Adapter	2	2 / 2
95Y2375	A2N5	Flex System FC3052 2-port 8Gb FC Adapter	2	2 / 2

\* For x4x models (where the Embedded 10Gb Virtual Fabric Adapter standard), and for xMx models (where a CN4022 2-port 10Gb Converged Adapter is standard), only one extra adapter can be installed in the compute node.

For adapter-to-switch compatibility, see the Flex System Interoperability Guide:

<http://www.redbooks.ibm.com/fsig>



## PCIe SSD adapters

The compute node supports the High IOPS SSD adapters listed in the following table. These adapters are installed in an attached PCIe Expansion Node.

Table 20. SSD adapters

Part number	Feature code	Description	Maximum supported
46C9078	A3J3	365GB High IOPS MLC Mono Adapter (low-profile adapter)	4
46C9081	A3J4	785GB High IOPS MLC Mono Adapter (low-profile adapter)	4
81Y4519*	5985	640GB High IOPS MLC Duo Adapter (full-height adapter)	2
81Y4527*	A1NB	1.28TB High IOPS MLC Duo Adapter (full-height adapter)	2
90Y4377	A3DY	1.2TB High IOPS MLC Mono Adapter (low-profile adapter)	2
90Y4397	A3DZ	2.4TB High IOPS MLC Duo Adapter (full-height adapter)	2
00AE983	ARYK	1250GB Enterprise Value io3 Flash Adapter for System x	4
00AE986	ARYL	1600GB Enterprise Value io3 FlashAdapter for System x	4
00AE989	ARYM	3200GB Enterprise Value io3 Flash Adapter for System x	4
00AE992	ARYN	6400GB Enterprise Value io3 Flash Adapter for System x	2
00AE995	ARYP	1000GB Enterprise io3 Flash Adapter for System x	4
00AE998	ARYQ	1300GB Enterprise io3 Flash Adapter for System x	4
00JY001	ARYR	2600GB Enterprise io3 Flash Adapter for System x	4
00JY004	ARYS	5200GB Enterprise io3 Flash Adapter for System x	2

\* Withdrawn from marketing

For more information about these adapters, see the Lenovo Press Product Guides in the Internal Storage category:

<http://www.redbooks.ibm.com/portals/systemx?Open&page=pg&cat=internalstorage>



## GPU and Crypto adapters

The compute node supports the GPU and Crypto adapters listed in the following table.

**Note:** These adapters are installed in an attached PCIe Expansion Node.

Table 21. GPU and Crypto adapters

Part number	Feature code	Description	Maximum supported
94Y5960	A1R4	NVIDIA Tesla M2090 (full-height adapter)	1*
47C2120	A4F1	NVIDIA GRID K1 for Flex System PCIe Expansion Node	1†
47C2121	A4F2	NVIDIA GRID K2 for Flex System PCIe Expansion Node	1†
47C2119	A4F3	NVIDIA Tesla K20 for Flex System PCIe Expansion Node	1†
47C2137	A5HD	NVIDIA Tesla K40 for Flex System PCIe Expansion Node	1†
47C2122	A4F4	Intel Xeon Phi 5110P for Flex System PCIe Expansion Node	1†

\* When this double-wide adapter is installed in the PCIe Expansion Node, it occupies both full-height slots. The low-profile slots and Flex System I/O expansion slots can still be used.

† If installed, only this adapter is supported in the system. No other PCIe adapters may be installed.

\*\* Orderable as separate MTM 4765-001 feature 4809. Available via AAS (e-config) only.

## Power supplies

Server power is derived from the power supplies installed in the chassis. There are no server options regarding power supplies.

## Integrated virtualization

The x240 supports the ESXi hypervisor on a USB memory key via the x240 USB Enablement Kit. This kit offers two internal USB ports. The x240 USB Enablement Kit and the supported USB memory keys are listed in the following table.

There are two types of USB keys, preloaded keys or blank keys. Blank keys allow you to download a Lenovo customized version of ESXi and load it onto the key. Preload keys are shipped with a specific version of ESXi already loaded. The x240 supports one or two keys installed, but only certain combinations:

Supported combinations:

- One preload key
- One blank key
- One preload key and one blank key
- Two blank keys

Unsupported combinations:

- Two preload keys

Installing two preloaded keys will prevent ESXi from booting as described in <http://kb.vmware.com/kb/1035107>. Having two keys installed provides a backup boot device. both devices are listed in the boot menu, which allows you to boot from either device or to set one as a backup in case the first one gets corrupted.

**Note:** The x240 USB Enablement Kit and USB memory keys are not supported if the SSD Expansion Kit (90Y4391) is already installed, because these kits occupy the same location in the server.

Table 22. Virtualization options

Part number	Feature code	Description	Maximum supported
49Y8119	A3A3	x240 USB Enablement Kit	1
41Y8298	A2G0	Blank USB Memory Key for VMware ESXi Downloads	2
41Y8300	A2VC	USB Memory Key for VMware ESXi 5.0	1
41Y8307	A383	USB Memory Key for VMware ESXi 5.0 Update1	1
41Y8311	A2R3	USB Memory Key for VMware ESXi 5.1	1
41Y8382	A4WZ	USB Memory Key for VMware ESXi 5.1 Update 1	1
41Y8385	A584	USB Memory Key for VMware ESXi 5.5	1

## Light path diagnostics

For quick problem determination when located physically at the server, the x240 offers a three-step guided path:

1. The Fault LED on the front panel
2. The light path diagnostics panel, shown in the following figure.
3. LEDs next to key components on the system board

The x240 light path diagnostics panel is visible when you remove the server from the chassis. The panel is located on the top right-hand side of the compute node, as shown in the following figure.



Figure 11. Location of x240 light path diagnostics panel

To illuminate the light path diagnostics LEDs, power off the compute node, slide it out of the chassis, and press the power button. The power button doubles as the light path diagnostics remind button when the server is removed from the chassis.

The meanings of the LEDs in the light path diagnostics panel are listed in the following table.

Table 23. Light path diagnostic panel LEDs

LED	Meaning
LP	The light path diagnostics panel is operational.
S BRD	A system board error is detected.
MIS	A mismatch has occurred between the processors, DIMMs, or HDDs within the configuration as reported by POST.
NMI	A non maskable interrupt (NMI) has occurred.
TEMP	An over-temperature condition occurs that was critical enough to shut down the server.
MEM	A memory fault has occurred. The corresponding DIMM error LEDs on the system board are also lit.
ADJ	A fault is detected in the adjacent expansion unit (if installed).

## Remote management

The server contains an Integrated Management Module II (IMM2), which interfaces with the advanced management module in the chassis. The combination of these provides advanced service-processor control, monitoring, and an alerting function. If an environmental condition exceeds a threshold or if a system component fails, LEDs on the system board are lit to help you diagnose the problem, the error is recorded in the event log, and you are alerted to the problem. A virtual presence capability comes standard for remote server management.

Remote server management is provided through industry-standard interfaces:

- Intelligent Platform Management Interface (IPMI) Version 2.0
- Simple Network Management Protocol (SNMP) Version 3
- Common Information Model (CIM)
- Web browser

The server also supports virtual media and remote control features, which provide the following functions:

- Remotely viewing video with graphics resolutions up to 1600x1200 at 75 Hz with up to 23 bits per pixel, regardless of the system state
- Remotely accessing the server using the keyboard and mouse from a remote client
- Mapping the CD or DVD drive, diskette drive, and USB flash drive on a remote client, and mapping ISO and diskette image files as virtual drives that are available for use by the server
- Uploading a diskette image to the IMM2 memory and mapping it to the server as a virtual drive
- Capturing blue-screen errors

## Supported operating systems

The server supports the following operating systems:

- Microsoft Windows Server 2008 HPC Edition
- Microsoft Windows Server 2008 R2
- Microsoft Windows Server 2008, Datacenter x64 Edition
- Microsoft Windows Server 2008, Enterprise x64 Edition
- Microsoft Windows Server 2008, Standard x64 Edition
- Microsoft Windows Server 2008, Web x64 Edition
- Microsoft Windows Server 2012
- Microsoft Windows Server 2012 R2
- Red Hat Enterprise Linux 5 Server with Xen x64 Edition
- Red Hat Enterprise Linux 5 Server x64 Edition
- Red Hat Enterprise Linux 6 Server x64 Edition
- Red Hat Enterprise Linux 7
- SUSE Enterprise Linux Server (SLES) 12
- SUSE LINUX Enterprise Server 11 for AMD64/EM64T
- SUSE LINUX Enterprise Server 11 with Xen for AMD64/EM64T
- SUSE Linux Enterprise Server 12 with XEN
- VMware vSphere 5.0 (ESXi)
- VMware vSphere 5.1 (ESXi)
- VMware vSphere 5.5 (ESXi)

**Note:** Support by some of these operating system versions will be after the date of initial availability. Check the ServerProven® website for the latest information about the specific versions and service levels supported and any other prerequisites:

<http://www.ibm.com/systems/info/x86servers/serverproven/compat/us/nos/matrix.shtml>

## Physical specifications

Dimensions and weight (approximate):

- Height: 56 mm (2.2 in)
- Depth: 492 mm (19.4 in)
- Width: 217 mm (8.6 in)
- Maximum weight: 7.1 kg (15.6 lb)

Shipping dimensions and weight (approximate):

- Height: 197 mm (7.8 in)
- Depth: 603 mm (23.7 in)
- Width: 430 mm (16.9 in)
- Weight: 8 kg (17.6 lb)

## Supported environment

The Flex System x240 compute node complies with ASHRAE Class A3 specifications.

This is the supported operating environment:

Power on:

- Temperature: 5 - 40 °C (41 - 104 °F)
- Humidity, non-condensing: -12 °C dew point (10.4 °F) and 8 - 85% relative humidity
- Maximum dew point: 24 °C (75 °F)
- Maximum altitude: 3048 m (10,000 ft)
- Maximum rate of temperature change: 5 °C/hr (41 °F/hr)

Power off:

- Temperature: 5 - 45 °C (41 - 113 °F)
- Relative humidity: 8 - 85%
- Maximum dew point: 27 °C (80.6 °F)

Storage (non-operating):

- Temperature: 1 - 60 °C (33.8 - 140 °F)
- Altitude: 3050 m (10,006 ft)
- Relative humidity: 5 - 80%
- Maximum dew point: 29 °C (84.2 °F)

Shipment (non-operating):

- Temperature: -40 - 60 °C (-40 - 140 °F)
- Altitude: 10,700 m (35,105 ft)
- Relative humidity: 5 - 100%
- Maximum dew point: 29 °C (84.2 °F)

## Warranty options

The Flex System x240 Compute Node has a three-year on-site warranty with 9x5 next-business-day terms. Lenovo offers the warranty service upgrades through ServicePac, discussed in this section. The ServicePac is a series of prepackaged warranty maintenance upgrades and post-warranty maintenance agreements with a well-defined scope of services, including service hours, response time, term of service, and service agreement terms and conditions.

ServicePac offerings are country-specific. That is, each country might have its own service types, service levels, response times, and terms and conditions. Not all covered types of ServicePac might be available in a particular country. For more information about ServicePac offerings available in your country, see the ServicePac Product Selector at <https://www-304.ibm.com/sales/gss/download/spst/servicepac>.

The following table explains warranty service definitions in more detail.

Table 24. Warranty service definitions

Term	Description
On-site repair (OR)	A service technician will come to the server's location for equipment repair.
24x7x2 hour	A service technician is scheduled to arrive at your customer's location within two hours after remote problem determination is completed. We provide 24-hour service, every day, including Lenovo holidays.
24x7x4 hour	A service technician is scheduled to arrive at your customer's location within four hours after remote problem determination is completed. We provide 24-hour service, every day, including Lenovo holidays.
9x5x4 hour	A service technician is scheduled to arrive at your customer's location within four business hours after remote problem determination is completed. We provide service from 8:00 a.m. to 5:00 p.m. in the customer's local time zone, Monday through Friday, excluding Lenovo holidays. If after 1:00 p.m. it is determined that on-site service is required, the customer can expect the service technician to arrive the morning of the following business day. For noncritical service requests, a service technician will arrive by the end of the following business day.
9x5 next business day	A service technician is scheduled to arrive at your customer's location on the business day after we receive your call, following remote problem determination. We provide service from 8:00 a.m. to 5:00 p.m. in the customer's local time zone, Monday through Friday, excluding Lenovo holidays.

In general, these are the types of ServicePacs:

- Warranty and maintenance service upgrades
  - One, two, three, four, or five years of 9x5 or 24x7 service coverage
  - On-site repair from the next business day to four or two hours
  - One or two years of warranty extension
- Remote technical support services
  - One or three years with 24x7 coverage (severity 1) or 9-5 next business day for all severities
  - Installation and startup support for System x® servers
  - Remote technical support for System x servers
  - Software support - Support Line
    - Microsoft or Linux software
    - VMware
    - IBM Systems Director

## Regulatory compliance

The server conforms to the following standards:

- ASHRAE Class A3
- FCC - Verified to comply with Part 15 of the FCC Rules Class A
- Canada ICES-004, issue 3 Class A
- UL/IEC 60950-1
- CSA C22.2 No. 60950-1
- NOM-019
- Argentina IEC 60950-1
- Japan VCCI, Class A
- IEC 60950-1 (CB Certificate and CB Test Report)
- China CCC (GB4943); (GB9254, Class A); (GB17625.1)
- Taiwan BSMI CNS13438, Class A; CNS14336
- Australia/New Zealand AS/NZS CISPR 22, Class A
- Korea KN22, Class A, KN24
- Russia/GOST ME01, IEC 60950-1, GOST R 51318.22, GOST R 51318.249, GOST R 51317.3.2, GOST R 51317.3.3
- IEC 60950-1 (CB Certificate and CB Test Report)
- CE Mark (EN55022 Class A, EN60950-1, EN55024, EN61000-3-2, EN61000-3-3)
- CISPR 22, Class A
- TUV-GS (EN60950-1/IEC 60950-1, EK1-ITB2000)

## Related publications and links

For more information, see the following resources:

- Lenovo Press Product Guides for System x servers and options  
<http://www.redbooks.ibm.com/portals/systemx?Open&page=pgbycat>
- US Announcement Letter  
<http://ibm.com/common/ssi/cgi-bin/ssialias?infotype=dd&subtype=ca&&htmlfid=897/ENUS113-198>
- Flex System x240 Compute Node product page  
<http://ibm.com/systems/flex/compute-nodes/x86/bto/>
- Flex System Information Center  
<http://publib.boulder.ibm.com/infocenter/flexsys/information/index.jsp>
- Flex System x240 Compute Node Installation and Service Guide  
[http://publib.boulder.ibm.com/infocenter/flexsys/information/topic/com.ibm.acc.8737.doc/printable\\_doc.html](http://publib.boulder.ibm.com/infocenter/flexsys/information/topic/com.ibm.acc.8737.doc/printable_doc.html)
- ServerProven for Flex System  
<http://ibm.com/systems/info/x86servers/serverproven/compat/us/flexsystems.html>
- ServerProven hardware compatibility page for the x240  
[http://ibm.com/systems/info/x86servers/serverproven/compat/us/flex/8737\\_7863.html](http://ibm.com/systems/info/x86servers/serverproven/compat/us/flex/8737_7863.html)
- ServerProven compatibility page for operating system support  
<http://ibm.com/systems/info/x86servers/serverproven/compat/us/nos/flexmatrix.shtml>
- Flex System Interoperability Guide  
<http://www.redbooks.ibm.com/fsig>
- Configuration and Option Guide  
<http://www.ibm.com/systems/xbc/cog/>
- xREF - System x Reference Sheets  
<http://www.redbooks.ibm.com/xref>
- System x Support Portal  
<http://ibm.com/support/entry/portal/>
- IBM System Storage® Interoperation Center  
<http://www.ibm.com/systems/support/storage/ssic>



# Notices

Lenovo may not offer the products, services, or features discussed in this document in all countries. Consult your local Lenovo representative for information on the products and services currently available in your area. Any reference to a Lenovo product, program, or service is not intended to state or imply that only that Lenovo product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any Lenovo intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any other product, program, or service. Lenovo may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not give you any license to these patents. You can send license inquiries, in writing, to:

*Lenovo (United States), Inc.  
1009 Think Place - Building One  
Morrisville, NC 27560  
U.S.A.  
Attention: Lenovo Director of Licensing*

LENOVO PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. Lenovo may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

The products described in this document are not intended for use in implantation or other life support applications where malfunction may result in injury or death to persons. The information contained in this document does not affect or change Lenovo product specifications or warranties. Nothing in this document shall operate as an express or implied license or indemnity under the intellectual property rights of Lenovo or third parties. All information contained in this document was obtained in specific environments and is presented as an illustration. The result obtained in other operating environments may vary. Lenovo may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Any references in this publication to non-Lenovo Web sites are provided for convenience only and do not in any manner serve as an endorsement of those Web sites. The materials at those Web sites are not part of the materials for this Lenovo product, and use of those Web sites is at your own risk. Any performance data contained herein was determined in a controlled environment. Therefore, the result obtained in other operating environments may vary significantly. Some measurements may have been made on development-level systems and there is no guarantee that these measurements will be the same on generally available systems. Furthermore, some measurements may have been estimated through extrapolation. Actual results may vary. Users of this document should verify the applicable data for their specific environment.

© Copyright Lenovo 2013-2015. All rights reserved.

This document was created or updated on January 30, 2015.

Send us your comments in one of the following ways:

- Use the online **Contact us** review form found at:  
[ibm.com/redbooks](http://ibm.com/redbooks)
- Send your comments in an e-mail to:  
[redbooks@us.ibm.com](mailto:redbooks@us.ibm.com)

This document is available online at <http://www.ibm.com/redbooks/abstracts/tips1090.html> .

## Trademarks

Lenovo, For Those Who Do and the Lenovo logo are trademarks or registered trademarks of Lenovo in the United States, other countries, or both. These and other Lenovo trademarked terms are marked on their first occurrence in this information with the appropriate symbol (® or ™), indicating US registered or common law trademarks owned by Lenovo at the time this information was published. Such trademarks may also be registered or common law trademarks in other countries. A current list of Lenovo trademarks is available on the Web at <http://www.lenovo.com/legal/copytrade.html>.

The following terms are trademarks of Lenovo in the United States, other countries, or both:

Flex System™  
Lenovo®  
Lenovo(logo)®  
ServeRAID™  
ServerGuide™  
ServerProven®  
System x®  
vNIC™

The following terms are trademarks of other companies:

Intel, Intel Xeon, Intel logo, Intel Inside logo, and Intel Centrino logo are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

Linux is a trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft, Windows, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

Other company, product, or service names may be trademarks or service marks of others.